

Envirofelt CO

Technical Data & Installation Guidelines



TenCate Polyfelt® Envirofelt CO




TenCate Polyfelt® Envirofelt CO is made from 100% natural, biodegradable coconut fibres (coir). The biodegradation process of the coir adds organic nutrients to the soil, thus acting as fertilizer. Envirofelt CO has the necessary strength to hold soil in place, thereby preventing surface erosion.

Technical Data

Properties <small>[Standard]</small>	Unit	CO 400	
Type of product	-	Woven net	
Raw material	-	100% natural coir (coconut fibres)	
Identification Properties			
Thickness <small>[EN ISO 9863-1]</small>	mm	7	
Mass per unit area <small>[EN ISO 9864]</small>	g/m ²	400	
Number of garns	MD	68	
	CD	62	
Proportion of open area	%	65	
Mechanical Properties			
Tensile strength	MD	kN/m	8
	CD	kN/m	5
Elongation	MD	%	25
	CD	%	25
Water absorption capacity <small>[DIN 53923]</small>	%	147	
Forms of Supply			
Width	m	2,0	
Length	m	25	
Area	m ²	50	
Roll weight	kg	20	
Rolls / bundle	no	5	

The values given are indicative and correspond to average results obtained in our laboratories and in testing institutes. The right is reserved to make changes without notice.

TenCate Polyfelt® Envirofelt CO - Installation Guidelines

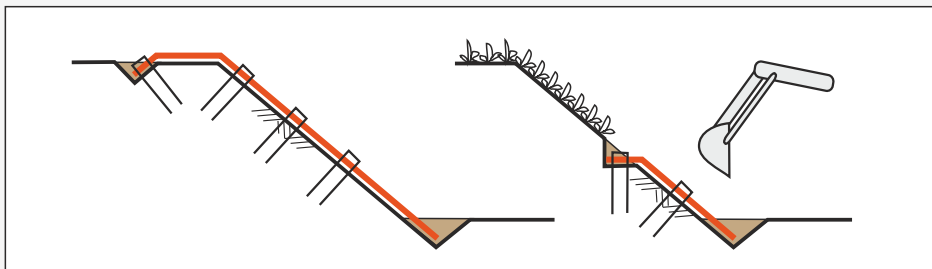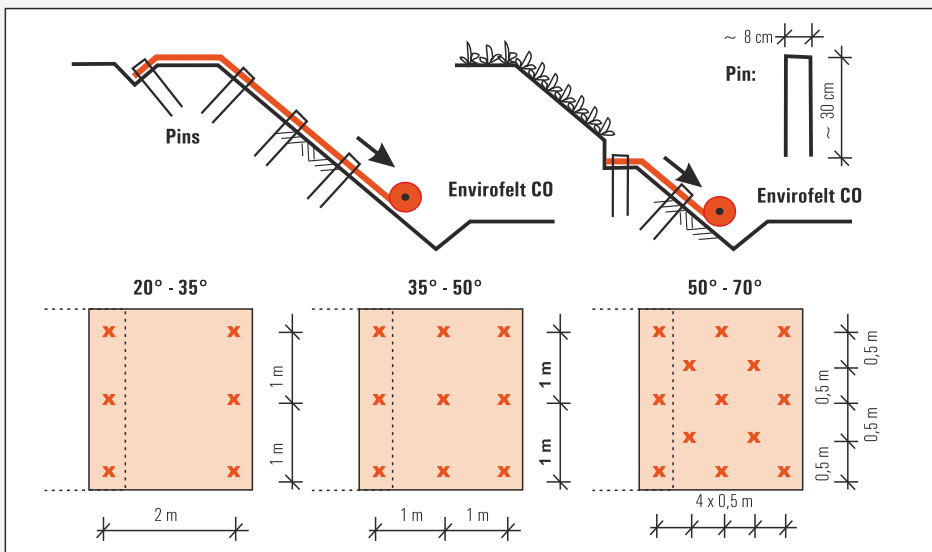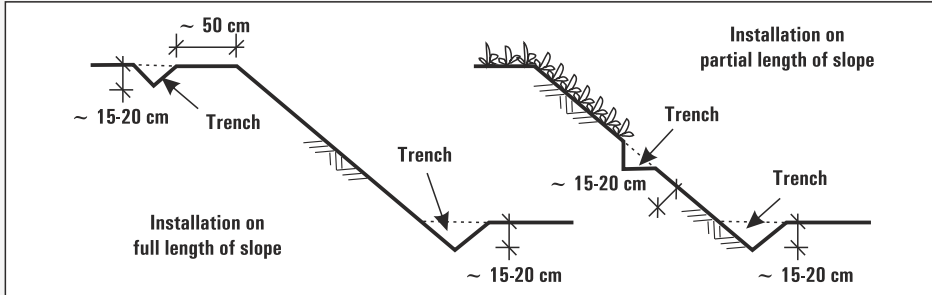

1. The subgrade shall be prepared in accordance with the designer's specification. It shall be smoothly compacted and free from stones, roots or other obstacles.
2. Apply seeds by hand, by hydro-seeding or by other suitable method.
3. Place the erosion-protection mat in the trench and unroll down the slope.
4. Fix the erosion-protection mat according to the sketch, depending on the slope angle. Overlap adjacent panels shall be approx. 5 cm. Pins shall be made from 8 mm steel rods, U-shaped and 30 cm long.
5. Backfill the anchor trench by hand or by excavator, and compact.

The information given in this brochure is to the best of our knowledge true and correct, however new research results and practical experience can make revisions necessary. No guarantee or liability can be drawn from the information mentioned herein. Furthermore, it is not our intention to violate any patents or licences.

TENCATE GEOSYNTHETICS AUSTRIA GMBH

Schachermayerstr. 18
A-4021 Linz, Austria
Tel. + 43 732 6983 0, Fax + 43 732 6983 5353
service.at@tencate.com, www.tencategeosynthetics.com

BeNeLux
Central Eastern Europe
Czech Republic
France / Africa
Germany
Italy
Near Middle East

Tel. + 31 546 544 811
Tel. + 43 732 6983 0
Tel. + 420 2 2425 1843
Tel. + 33 1 34 23 53 63
Tel. + 49 6074 3751 50
Tel. + 39 0362 34 58 11
Tel. + 971 481 03295

service.nl@tencate.com
service.at@tencate.com
service.cz@tencate.com
service.fr@tencate.com
service.de@tencate.com
service.it@tencate.com
service.nme@tencate.com

Poland
Romania
Russia / CIS
Scandinavia / Baltics
Spain / Portugal
Turkey
UK / Ireland

Tel. + 48 12 268 8375
Tel. + 40 21 322 06 08
Tel. + 43 732 6983 0
Tel. + 45 4485 7474
Tel. + 34 916 506 318
Tel. + 43 732 6983 0
Tel. + 44 1952 588 066

service.pl@tencate.com
service.ro@tencate.com
service.ru@tencate.com
service.dk@tencate.com
service.es@tencate.com
service.tr@tencate.com
service.uk@tencate.com

