


# TenCate Miragrid GX

## Technical Data

TenCate Miragrid GX uniaxial geogrids are engineered materials suitable for short and long term soil reinforcement applications. They are composed of high modulus polyester fibres, knitted in a flat orientation and covered with a protective polymeric coating.

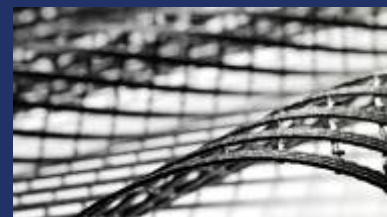

TenCate Miragrid GX

Properties <small>[Standard]</small>	Unit	GX 35/20	GX 55/30	GX 80/30	GX 110/30	GX 160/30	GX 200/30	GX 400/30	
<b>Mechanical Properties</b>									
Tensile strength <small>[EN ISO 10319]</small>	MD	kN/m	38	58	84	116	168	210	420
	min	kN/m	35	55	80	110	160	200	400
	CD	kN/m	20	30	30	30	30	30	30
	min	kN/m	15	25	25	25	25	25	25
Elongation at nominal strength <small>[EN ISO 10319]</small>	MD	%	10.5	10.5	10.5	10.5	10.5	10.5	10.5
	CD	%	12	12	12	12	12	12	12
Mesh size <small>[+/- 5 mm]</small>	MD	mm	25	25	25	25	25	25	25
	CD	mm	25	25	25	25	25	25	25
<b>Forms of Supply</b>									
Roll width		m	5.2	5.2	5.2	5.2	5.2	5.2	5.2
Roll length		m	100	100	100	100	50	50	50
Roll weight <small>[+/- 10%]</small>		kg	120	150	185	240	160	190	350

MD = machine direction / CD = cross direction

min: These values are given within the 95% confidence level.

For information concerning long term design strength, friction behaviour or other product properties please contact TenCate Geosynthetics.

The values given are average values obtained in our laboratories and in accredited testing institutes. The information given in this datasheet is to the best of our knowledge true and correct. However new research results and practical experience can make revisions necessary. The right is reserved to make changes without notice at any time. No guarantee or liability can be drawn from the information mentioned herein.

#### TENCATE GEOSYNTHETICS AUSTRIA GMBH

Schachermayerstr. 18 | Tel. +43 732 6983 0, Fax +43 732 6983 5353  
A-4021 Linz, Austria | service.at@tencate.com, www.tencategeosynthetics.com

**BeNeLux** | Tel. +31 546 544 811 | service.nl@tencate.com  
**Central Eastern Europe** | Tel. +43 732 6983 0 | service.at@tencate.com  
**Czech Republic** | Tel. +420 2 2425 1843 | service.cz@tencate.com  
**France / Africa** | Fax +33 1 34 23 53 48 | service.fr@tencate.com  
**Germany** | Tel. +49 6074 3751 61 | service.de@tencate.com  
**Italy** | Tel. +39 0362 34 58 11 | service.it@tencate.com  
**Near Middle East** | Tel. +971 4810 3295 | service.nme@tencate.com

**Poland** | Tel. +48 12 268 8375 | service.pl@tencate.com  
**Russia / CIS** | Tel. +43 732 6983 0 | service.ru@tencate.com  
**Scandinavia / Baltics** | Tel. +31 546 544 811 | geonordic@tencate.com  
**Spain / Portugal** | Tel. +34 607 499 962 | service.es@tencate.com  
**Turkey** | Tel. +43 732 6983 0 | service.tr@tencate.com  
**UK / Ireland** | Tel. +44 1952 588 066 | service.uk@tencate.com



502188 | 02.2015/EN | DJ, SK

Protective Fabrics  
Space Composites  
Aerospace Composites  
Advanced Armour

Geosynthetics  
Grass