


The solution for soil stabilization in public or residential areas.



A proven solution for Soil stabilization
+ For the build-up of well-draining soil structures
+ Flexible structure

+ High resistance and durability

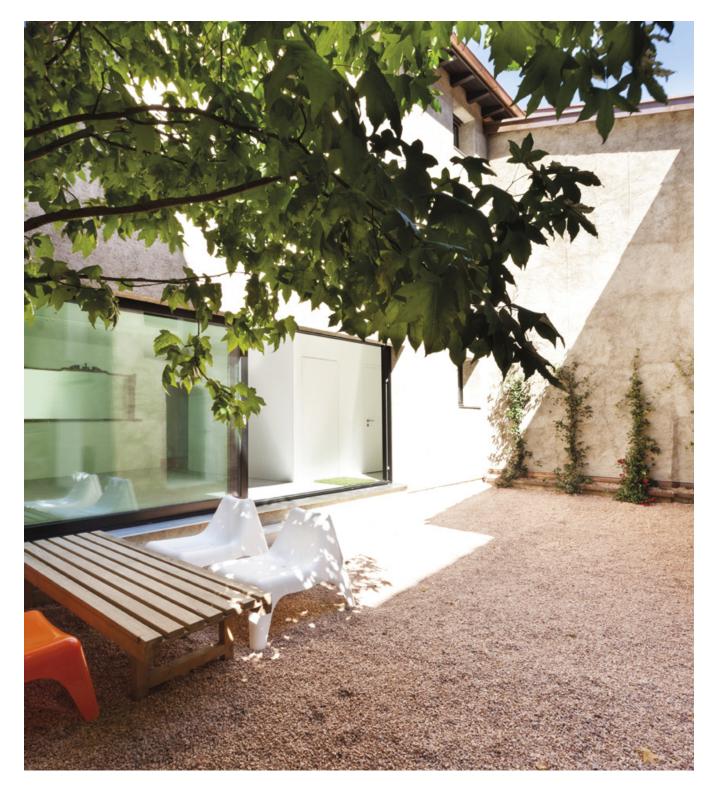

# **TenCate Polyfelt**<sup>®</sup> Accorder<sup>®</sup>

High performance flexible three-dimensional structure

# The ideal solution for aggregate surfaces, Stable and water-permeable. Suitable for all vehicles.





No more water runoff, puddles or ruts. Driveways, patios, parking lots, garage entrances, Car Parks, parks and gardens, golf courses, Driveways and low-traffic roads... TenCate Polyfelt<sup>®</sup> Accorder<sup>®</sup> can be immediately trafficked.

PRODUCT **BENEFITS** 

- Flexible and can be installed on uneven ground and slopes up to 15 degrees.
- Continuity of material between the walls and the bottom of the cell: A high strength product offering improved containment and a reduction in fill materials.
- Suitable and can be trafficked immediately with Trucks, Cars, Wheelbarrows, Wheelchairs, Bikes and Motorbikes ...

Tencate Polyfelt<sup>®</sup> Accorder<sup>®</sup>, soil stabilization solution, provides a draining surface.

- + Significantly reduces rutting.
- + All types of filling materials can be used: sand, gravel, aggregates, expanded clay balls, etc...
- + Large dimensions covered at one time.

# **Easy Installation**





- It's light weight and allows a quick installation with no need for any specialist tools.
- It can be walked on before filling without damaging the product. The cells return to their original shape.
- Immediately passable by public works machinery.

# Specification

- High performance cellular structure,
- Significantly reduces rutting of the aggregate surface
- A flexible structure that adapts to the irregular surface of the ground, can be installed in curves and on slopes
- Lightweight, easy to handle, transport, cut and quick to install
- High resistance to traffic
- Durability 50 years with compliance with installation instructions

## FEATURES

Environmentally friendly sustainable solution

# Format & Packaging

- Folded panel =  $5 \times 1 \text{ m}$
- Unfolded panel = approx. 4.4 x 20 m\*
- Foldable panel, easy to transport, If folded can be transported by car
- •Width of the panel about 4.40 m for a surface area of 90 to 100 m<sup>2</sup> in function of stretching during the break







#### **Tencate Geosynthetics Austria GmbH** Schachermayerstrasse 18 A - 4021 Linz - Austria Email: service.at@tencategeo.com Tel: +43 732 6983 0 Tel: +43 732 6983 0

### **Tencate Geosynthetics France S.A.S.** 9, rue Marcel Paul - B.P. 40080

9, rue Marcel Paul - B.P. 40080 95873 Bezons Cedex - France Tel. +33 (0)1 34 23 53 63 Fax +33 (0)1 34 23 53 48 service.fr@tencategeo.com

### **Tencate Geosynthetics Netherlands B.V.**

Europalann 206 7559 SC Hengelo - The Netherlands Tel. +31 (0)546 544 811 service.nl@tencategeo.com

#### C 2020, TenCate Geosynthetics Holding by and/or its subsidiaries.

This brochure contains proprietary information owned by or licensed to TenCate Geosynthetics Holding by and/or its subsidiaries (individually and collectively, "TenCate"), including but not limited to trademarks, trade names, and graphic material, as protected by law. Any reproduction, distribution, or sale in any form of the content of this brochure without the express written approval of TenCate is strictly prohibited. All information published in this brochure is selected with the utmost care; however, no rights whatsoever can be derived from this brochure and/or its content and TenCate accepts no liability for it. TenCate Polyfelt®, TenCate Bidim®, TenCate Rock®, TenCate Geolon®, TenCate Miragrid®, TenCate GeoDetect®, TenCate Geotube® and all related characters, logos and trade names are claimed and/or registered trademarks and/or trade logos of TenCate without express written approval of TenCate is strictly prohibited.





aptember 2020 - EN - Article 503666